



GENERAL FEATURES

- Rack dimensions: **50x50 cm**
- Net weight: 126 Kg
- Wash cycles / racks per hour: 60"-120"-180"-9' / 60-30-20-7
- Automatic cycle start upon door closure
- Stainless-steel wash/rinse arms easily removable
- Wash pump: 750 W
- Boiler capacity: 11 lt
- Tank capacity: 30 lt
- Boiler heating element: 6 kW
- Tank heating element: 2,8 kW
- Water quantity per cycle: 2,5 lt
- Useful washing height: 425 mm
- Electronic management with 6-character LED display showing boiler and tank temperatures, multicoloured start button and self-diagnostic system
- PRS System: built-in atmospheric boiler, independent from the water supply pressure, with rinse pump to guarantee constant rinse temperature and pressure throughout the entire rinse phase
- High efficiency air gap (A class)
- Double electric detergent and rinse aid dispenser
- Thermostop function (hot rinse)
- Green function for energy saving
- Automatic end of day self-cleaning cycle
- Self-cleaning vertical washing pump

WATER FILTRATION

- Pre-filtering of the tank water by means of Stainless steel filter
- Plastic wash pump filter, easily removable

BODY

- AISI 304 stainless-steel structure
- Single skinned hood
- Preformed wash tank with rounded corners to avoid grime build-up
- Hood opening system with springs
- Boiler in stainless-steel AISI 316

STANDARD EQUIPMENT

- 2 plate racks 50x50 cm
- 1 glass rack 50x50 cm
- 2 cutlery holders
- 1 inlet hose (length 2 mt)
- 1 drain hose (length 2 mt)

OPTIONS

- HD version (14,8 kW in 380-415V 3N~)
- Boiler heating element 9 kW (XP)
- Built-in automatic water softener (S)
- Drain pump (DP)
- Double skinned insulated hood (DSI)
- Hot water filling max 85°C (HW)
- Chemicals level sensors (CLS)
- KIT remote control
- 60 Hz version

WATER TREATMENT ACCESSORIES

- Automatic water softener
- Reverse osmosis machine

ACCESSORIES

- Entry / exit tables in stainless-steel
- Pre-wash tables in stainless-steel
- Special racks

WATER SUPPLY CONNECTION

- **Water supply hardness:**
Water hardness between 0 and 14°f (0 ÷ 8°d)
Above 14°f (8°d) suggested water softener
- **Water supply dynamic pressure:**
Standard between 1 and 5 BAR
With built-in water softener between 1 and 4 BAR
- **Water supply temperature:**
Standard between 10 and 60°C
With built-in water softener between 10 and 25°C


MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided

TECHNICAL SPECIFICATIONS

- Electrical supply: **380-415V 3N / 220-240V3 / 220-240V~ 50 Hz (MULTIPOWER)**
- Total power: **6,75 kW (9,55 kW in HD)**
- Absorbed current: **10 A / 17 A / 29 A (20 A in HD)**
- Power cord supply size: **5 x 4 mm² / 3 x 4 mm²**

AH 800 ESI PRS

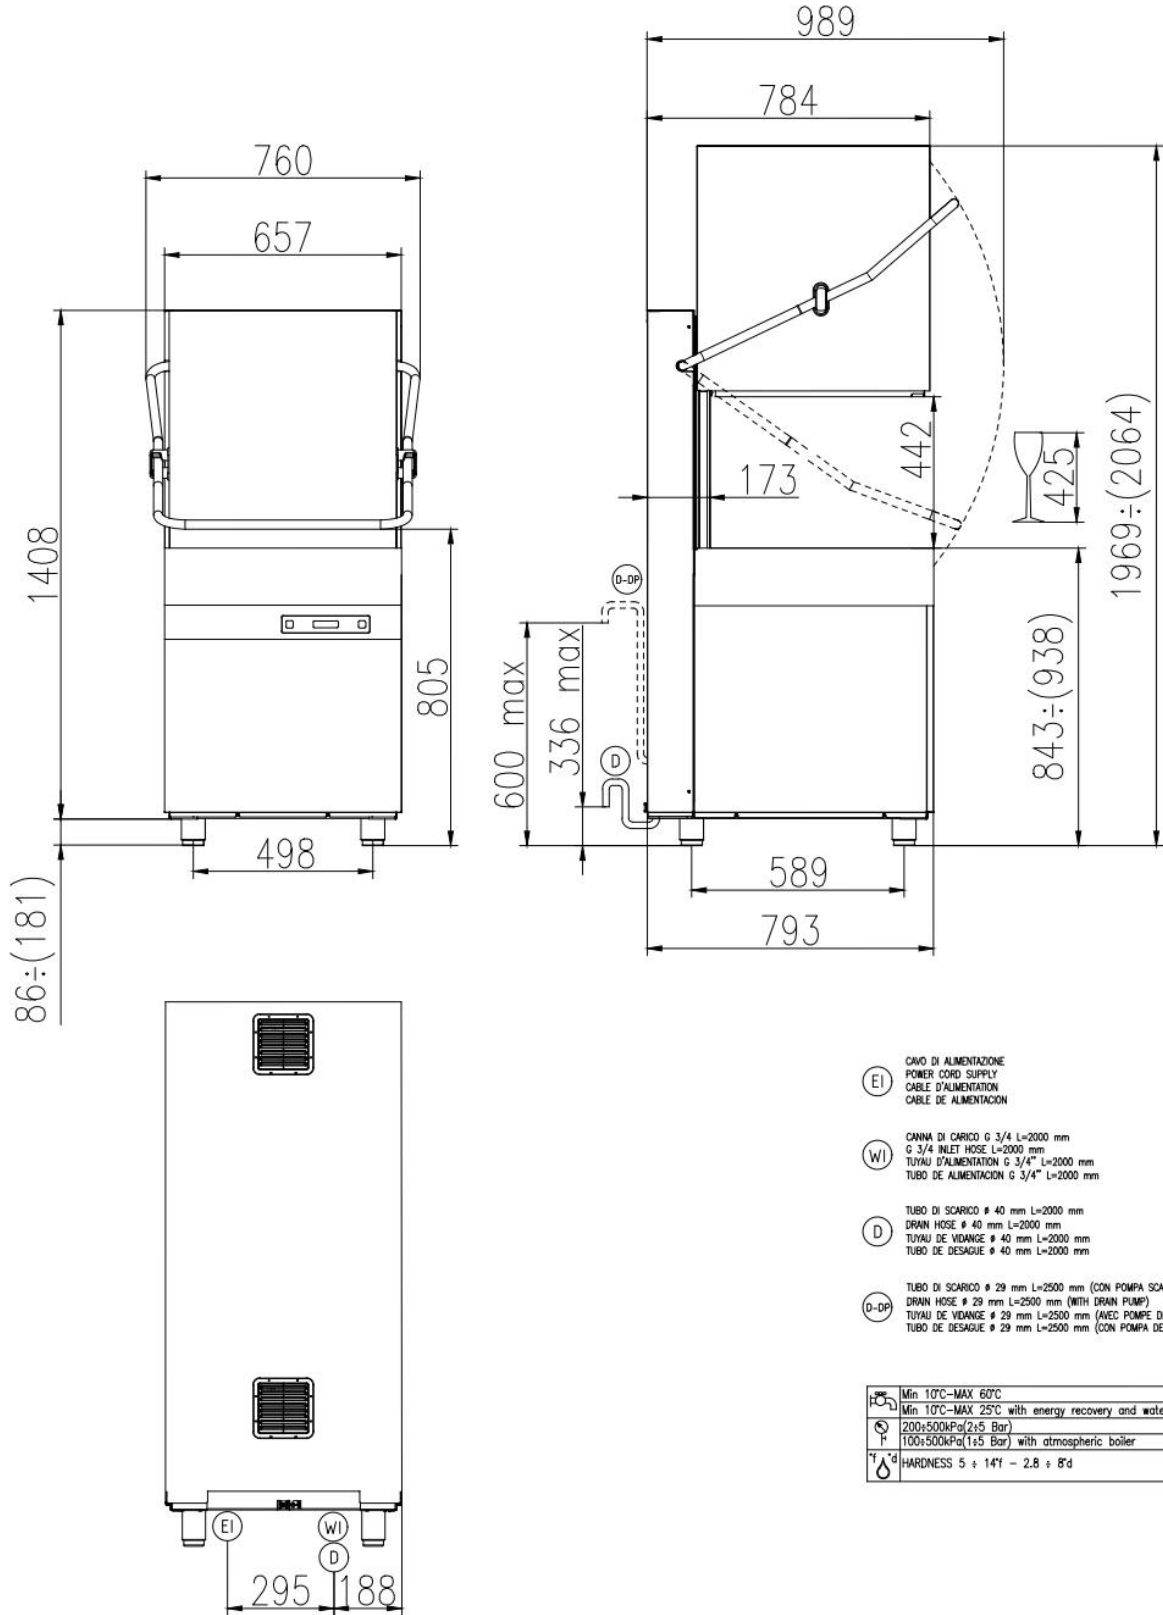

- (EI) CAVO DI ALIMENTAZIONE
POWER CORD SUPPLY
CABLE D'ALIMENTATION
CABLE DE ALIMENTACION
- (WI) CANNA DI CARICO \varnothing 3/4" L=2000 mm
 \varnothing 3/4" INLET HOSE L=2000 mm
TUYAU D'ALIMENTATION \varnothing 3/4" L=2000 mm
TUBO DE ALIMENTACION \varnothing 3/4" L=2000 mm
- (D) TUBO DI SCARICO \varnothing 40 mm L=2000 mm
DRAIN HOSE \varnothing 40 mm L=2000 mm
TUYAU DE VIDANGE \varnothing 40 mm L=2000 mm
TUBO DE DESAGUE \varnothing 40 mm L=2000 mm
- (D-DP) TUBO DI SCARICO \varnothing 29 mm L=2500 mm (CON POMPA SCARICO)
DRAIN HOSE \varnothing 29 mm L=2500 mm (WITH DRAIN PUMP)
TUYAU DE VIDANGE \varnothing 29 mm L=2500 mm (AVEC POMPE DE VIDANGE)
TUBO DE DESAGUE \varnothing 29 mm L=2500 mm (CON POMPA DE DESAGUE)

T _{min}	Min 10°C-MAX 60°C
	Min 10°C-MAX 25°C with energy recovery and water softener
P	200±500kPa(2±5 Bar)
	100±500kPa(1±5 Bar) with atmospheric boiler
H	HARDNESS 5 ± 14°f - 2.8 ± 8°d