



### GENERAL FEATURES

- Rack size **56.5x69 cm**
- Gross weight: 222 Kg
- Wash cycles/racks per hour: 2'-3'-6'-9'/30-20-10-7
- Stainless steel wash/rinse arms easily removable
- Wash pump: 1,5 kW
- Boiler capacity: 11 liters
- Tank capacity: 65 liters
- Boiler heating element: 6 kW
- Tank heating element: 6 kW
- Water quantity per cycle: 3,5 liters
- Useful washing height: 800 mm
- Electronic management with color LCD display showing boiler and tank temperatures, multicolored start button and self-diagnostic system
- ES System: energy-saving device that recovers the steam produced inside the machine to heat the incoming cold water
- PRS System: built-in atmospheric boiler, independent from the water supply pressure, with rinse pump to guarantee constant rinse temperature and pressure throughout the entire rinse phase
- High efficiency air gap (A class)
- Double electric detergent and rinse-aid dispenser
- Thermostop function (hot rinse)
- Green Function for energy saving
- Automatic end-of-day self-cleaning of wash tank
- Vertical self-cleaning washing pump

### FILTRATION

- Pre-filtering of the tank water by means of stainless-steel filter equipped with collection basket
- Stainless-steel pump filter, easily removable

### BODY

- AISI 304 stainless-steel body
- Double skinned insulated body
- Preformed wash tank in stainless-steel AISI 316 with rounded corners to avoid grime build-up
- Stainless-steel door handle
- Boiler in stainless-steel AISI 316

### EQUIPMENT

- 1 stainless-steel rack 56.5x69 cm with wheels
- 1 inlet hose (2 mt length)
- 1 drain hose (2 mt length)

### OPTIONS

- HD version (13,5 kW, in 380-415V 3N ~ )
- Drain pump (DP)
- Chemicals level sensors (CLS)
- Wi-Fi connection (WIFI)
- 60 Hz version

### ACCESSORIES FOR WATER TREATMENT

- External water softener

### ACCESSORIES

- Stainless-steel special tray holders

### WATER SUPPLY CONNECTION

- **Water supply hardness:**  
Water hardness between 0 and 14°f (0 ÷ 8°d)  
Above 14°f (8°d) suggested water softener
- **Water supply dynamic pressure:**  
Standard between 1 and 5 BAR
- **Water supply temperature:**  
Standard between 10 and 25°C


### MAIN POWER SUPPLY

- The voltage of main power supply must be compatible with the rated voltage
- The machine must be connected to a suitable earth (ground) system
- Connect the machine power socket to the multi-pole wall switch provided

### TECHNICAL SPECIFICATIONS

- Electrical supply: **380-415V 3N / 220-240V3~50Hz**  
**380-415V 3 (MULTIPOWER)**
- Total power: **7,5 kW (13,5 kW in HD)**
- Absorbed current: **11 A / 19 A (20 A in HD)**
- Power cord supply size: **5 x 4 mm<sup>2</sup>**

## AU 55.80 EPI ES

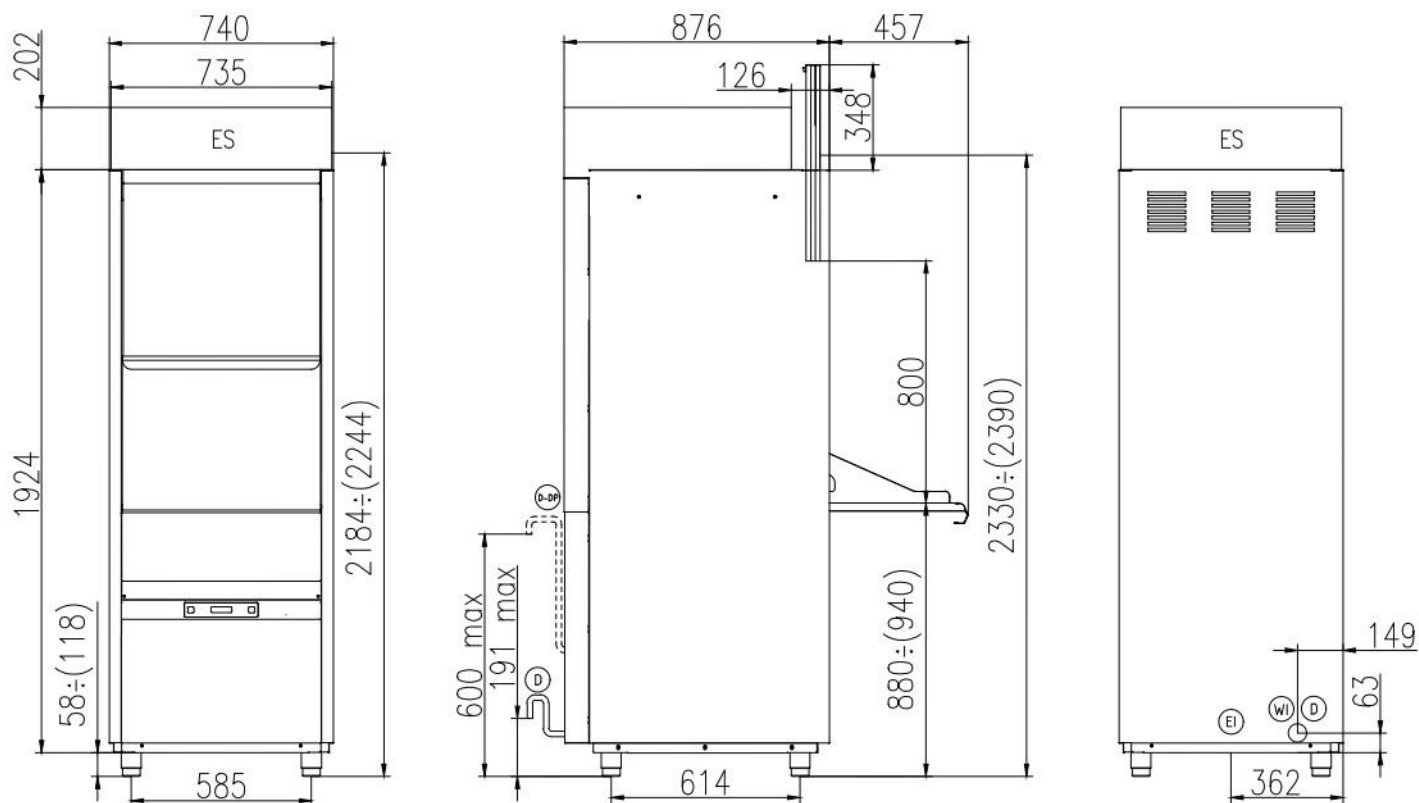






EI CAVO DI ALIMENTAZIONE  
 POWER CORD SUPPLY  
 CABLE D'ALIMENTATION  
 CABLE DE ALIMENTACION

WI CANNA DI CARICO G 3/4 L=2000 mm  
 G 3/4 INLET HOSE L=2000 mm  
 TUYAU D'ALIMENTATION G 3/4" L=2000 mm  
 TUBO DE ALIMENTACION G 3/4" L=2000 mm

D TUBO DI SCARICO  $\phi$  40 mm L=2000 mm  
 DRAIN HOSE  $\phi$  40 mm L=2000 mm  
 TUYAU DE VIDANGE  $\phi$  40 mm L=2000 mm  
 TUBO DE DESAGUE  $\phi$  40 mm L=2000 mm

D-DP TUBO DI SCARICO  $\phi$  29 mm L=2500 mm (CON POMPA SCARICO)  
 DRAIN HOSE  $\phi$  29 mm L=2500 mm (WITH DRAIN PUMP)  
 TUYAU DE VIDANGE  $\phi$  29 mm L=2500 mm (AVEC POMPE DE VIDANGE)  
 TUBO DE DESAGUE  $\phi$  29 mm L=2500 mm (CON POMPA DE DESAGUE)

	Min 10°C-MAX 60°C
	Min 10°C-MAX 25°C with energy recovery and water softener
	200÷500kPa(2÷5 Bar)
	100÷500kPa(1÷5 Bar) with atmospheric boiler
	HARDNESS 5÷14°f-2.8÷8°d